

# TECHNICAL FOCUS ON THE **HORIZON**

## TORNADO AND FERTI-SPACE2

Technical Guide for Making the Right Purchase for your Business




# JOSKIN®

# HORIZON SYSTEM ON TOR

TORNADO, A MUCK SPREADER WITH NARROW BODY FOR PROFESSIONALS

Standard ✓ or optional + equipment



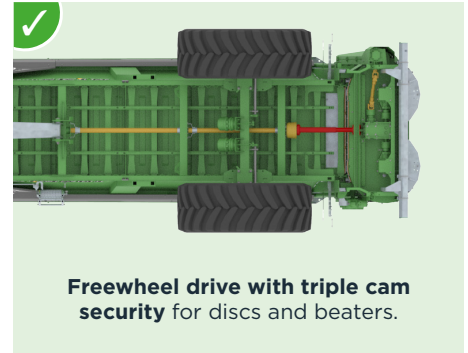


## COMMON EQUIPMENT FOR TORNADO

Full control of the electrohydraulic functions of the vehicle.




Precision DPA (proportional flow control)

See technical focus on electronic systems





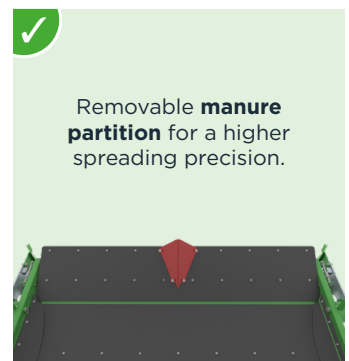
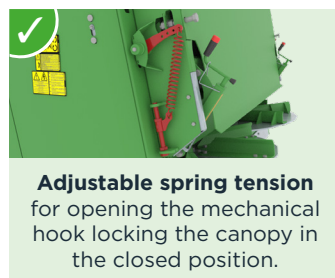
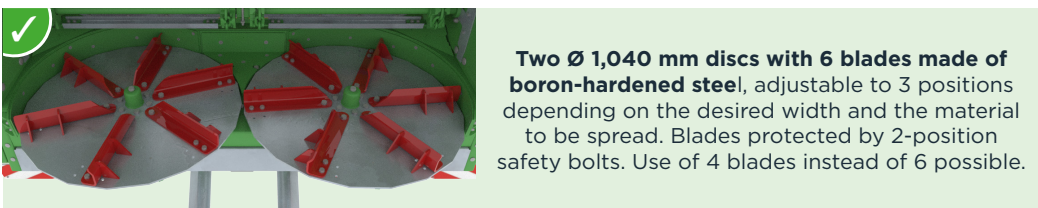


# NADO AND FERTI-SPACE2

## FERTI-SPACE2, A LARGE-VOLUME MUCK SPREADER WITH A WIDE BODY

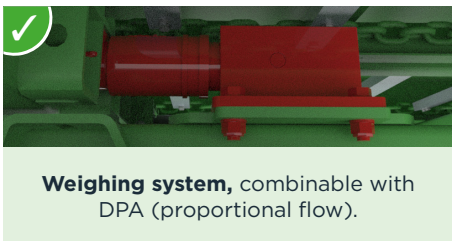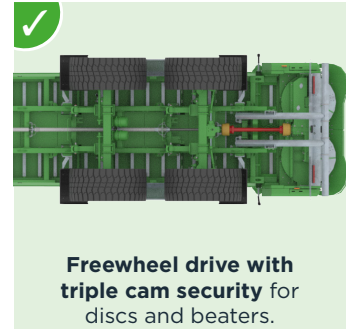

## HORIZON AND FERTI-SPACE2 HORIZON

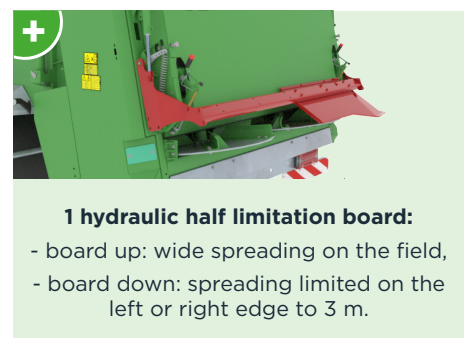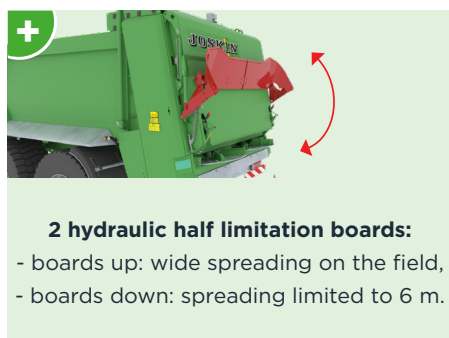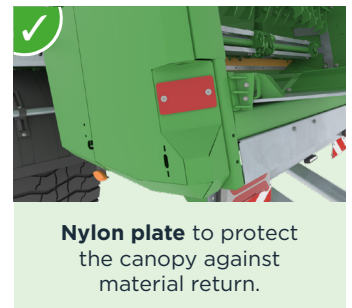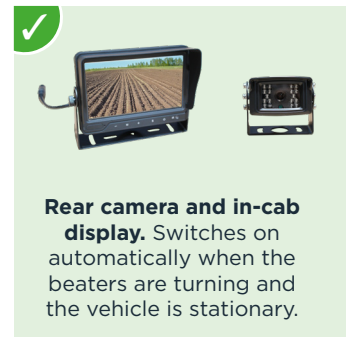

# HORIZON SYSTEM

## HORIZONTAL SPREADING RANGE FOR TORNADO AND FERTI-SPACE2

The JOSKIN horizontal spreading system guarantees optimal precision over a width of approx. 20 metres, depending on the material to be spread.

The dimensions below are given in meters (m).



2 Ø 600 mm horizontal beaters with 46 teeth each (92 in total)

2 Ø 600 mm horizontal beaters with 60 teeth each (120 in total)

3 Ø 525 mm horizontal beaters with 60 teeth each (180 in total)



1.87\*

Passage of Manure  
Inside width  
Outside width

1.775  
2.371



1.765\*

2.125  
2.55



1.885\*

2.125  
2.55

\*Height at which manure arrives to the beaters.

For chassis and body specifications, see Tornado and Ferti-SPACE2 Focus folders.



www.joskin.com • Rue de Wergifosse, 39 - 4630 Soumagne (Belgium)

E-mail: info@joskin.com • Tel.: +32 (0)4 377 35 45