TECHNICAL FOCUS ON TRANS-PALM

Technical guide for making the right purchase





TRANS-PALM


MONOCOQUE AGRICULTURAL TIPPING TRAILER WITH VERY LOW LOADING HEIGHT

Standard 🕜 or optional equipment 🛨

















Hydropneumatic drawbar suspension



Drawbar with mechanical suspension and height-adjustment (2 positions).






LED flash bar

Wide choice of bolted eyelets (A) Ø 50 mm swivel eye (B) Ø 80 mm knee-joint eyelet (C) Ø 50 mm flat eyelet (standard) (D) Ø 40 mm fixed eyelet


















Body protection with 2-component paint (2K industrial quality)

(A) Side walls and floor in 4 mm thick high tensile steel.

(B) Automatic shot-blasting with 20 turbines (2,300 kg shot/min).

(C) 2K primer coat applied directly after blasting + flash-off before applying the finish.


(D) 2K topcoat with accelerated drying at 60°C.



Tapered body (2.18 m at the front and 2.26 m at the rear) to facilitate unloading.





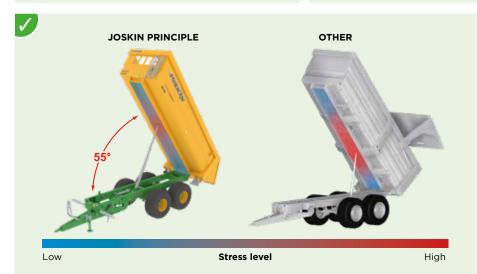

55° tipping system with the cylinder in a forward position in the chassis to reduce the stress level.



Telescopic tipping cylinder on a double-oscillating frame with greased bearings.

Tipping stabiliser

for Roll-Over bogie.



Tipping by P.T.O.-driven auxiliary pump





Rear and side bumpers

Rear hitch









Rods in addition to Plexiglas for the 4 front sight windows (on models 125).



Large front sight window with galvanised rods and transparent Plexiglas (on models 125).

WIDE RANGE OF

TRANS-PALM



An easy, practical tipping trailer that stands up to any challenge!



