

TECHNICAL FOCUS ON **SCARIFLEX**

Technical guide to a proper aeration of your pastures



JOSKIN


SCARIFLEX

HIGH-TECH MEADOW AERATORS!

Standard ✓ or optional equipment +



Parking stands for a good stability when unhitching.

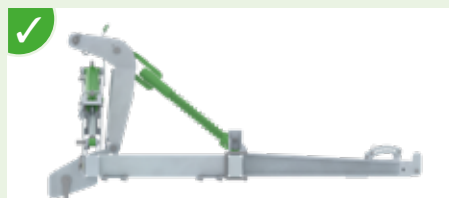

Independent tubular support frame coupled with an **articulated hitch** and a **spring-loaded 3rd point** for a smooth follow-up of the ground.




Spring-loaded 3rd point locking for a good stability on the road (models: 7.2 to 12 m).







Hydraulic and mechanical locking of the extensions for maximum safety on the road.




Guide cones for easy hitching to the tractor (3-point, category 2).

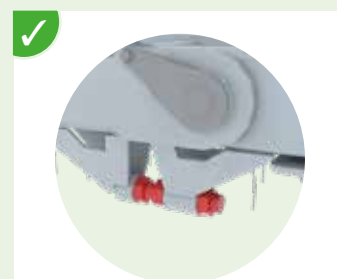

Adjustable stops for a perfect alignment of the extensions.

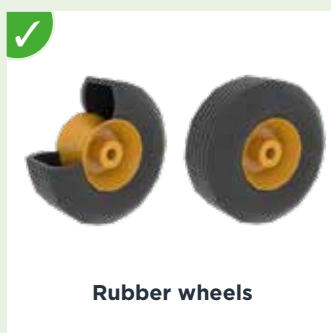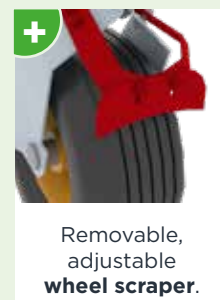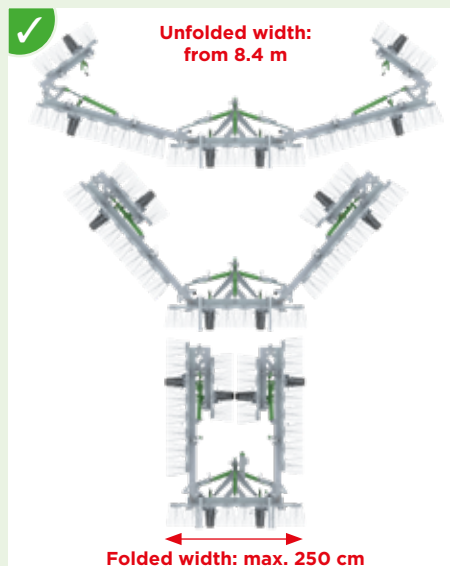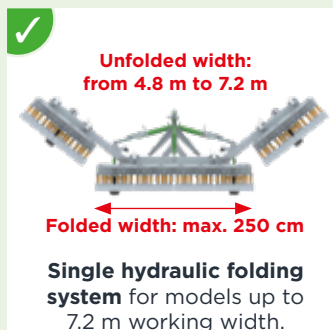


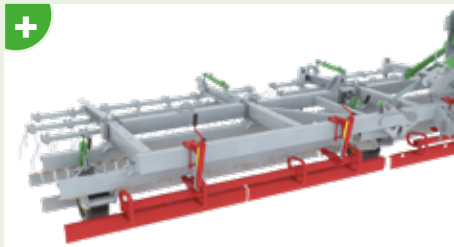


Independent scraper blades of variable width (90 to 130 cm) depending on model, positioned in front of the wheels to level the ground.




Height adjustment of the scraper blades by crank handle with graduation and marking arrow.

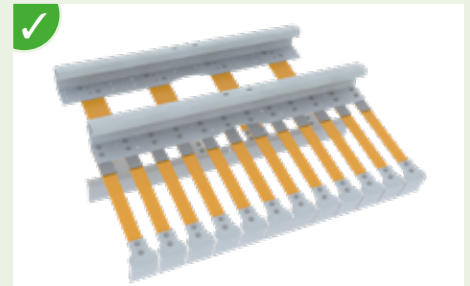

Double row of spreading paddles on R5S3.

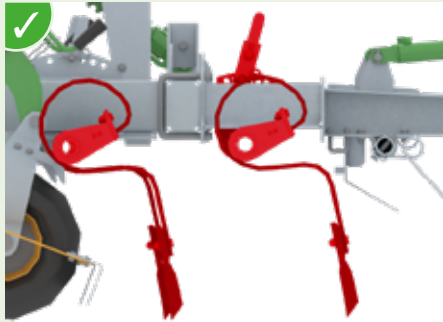


2 rows of scarifying shares (aggressive tines) with adjustable angle of attack on R6D2S3.

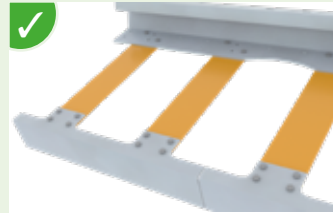


60 cm scrapers mounted on semi-flexible spring leaves on R6D2S3, R6S5 and R5S3.




10 cm scrapers mounted on very flexible spring leaves on R5S3.

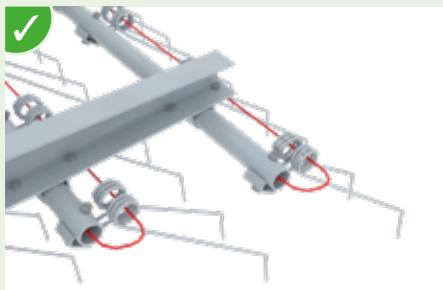


Safety cable to prevent losing tines

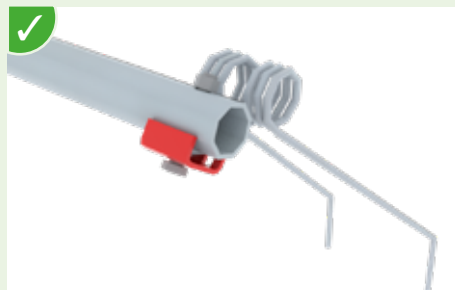


Ø 8 mm spring tines with centering bracket

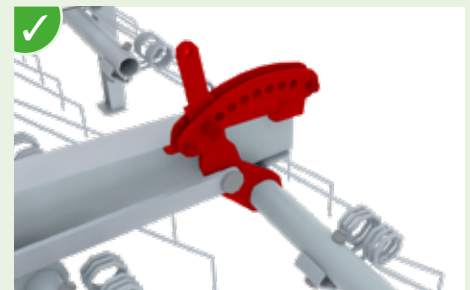


Manual adjustment of the tine aggressiveness

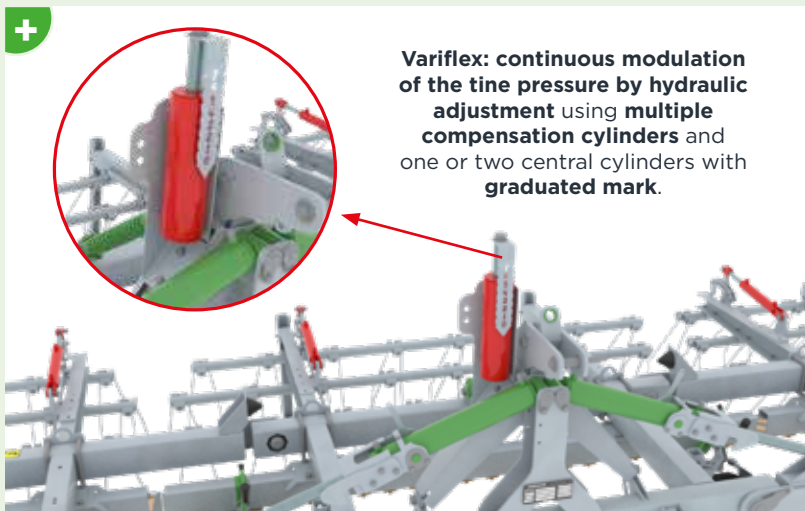


Variflex: continuous modulation of the tine pressure by hydraulic adjustment using multiple compensation cylinders and one or two central cylinders with graduated mark.

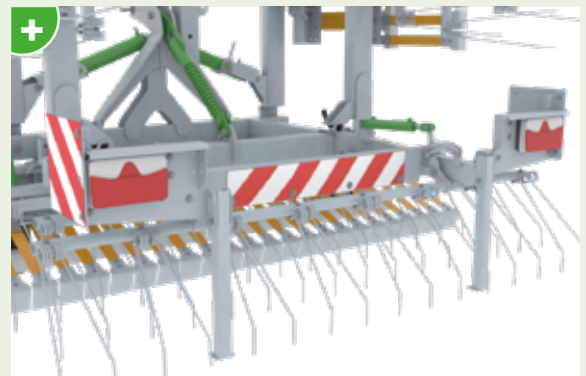

LED lighting with striped boards (red and white).

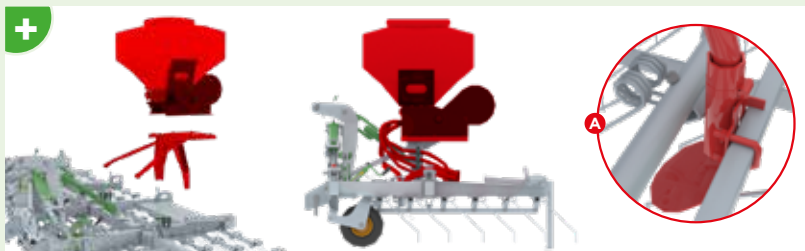


Air seeder (120 or 300 l) with electric or hydraulic drive with DPA (proportional flow). Mounted close to the tractor for a good load distribution. Pre-equipment possible on models 480, 600, 720 and 960. **(A) Seed distributors** (8 or 12 depending on model).

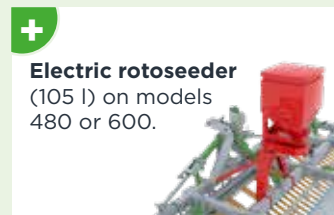

Electric roto-seeder (105 l) on models 480 or 600.



DPA - proportional flow (air seeder).

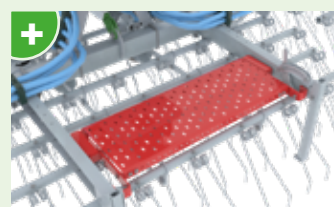


Step for a safe access to the air seeder.

WIDE SCARIFLEX RANGE



AERATORS ADAPTED TO YOUR PASTURES

4 basic models with identical frame





R5S3 (4.8 m - 6 m - 7.2 m - 8.4 m - 9.6 m - 10.8 m)

- + 1 row of scraper blades on springs
- ✓ 1 row of 60 cm scrapers on 2 half-flexible leaves
- ✓ 1 row of 10 cm spreading paddles on very flexible leaves
- ✓ 3 rows of spring tines

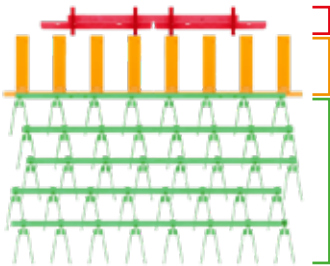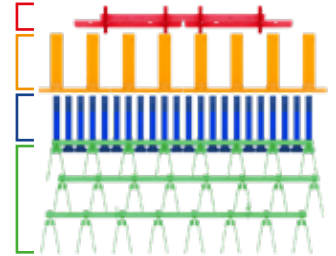



R6S5 (4.8 m - 6 m - 7.2 m - 8.4 m - 9.6 m - 10.8 m)

- + 1 row of scraper blades on springs
- ✓ 1 row of 60 cm scrapers on 2 half-flexible leaves
- ✓ 5 rows of spring tines

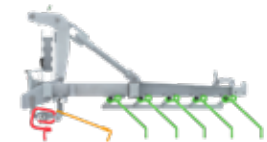

R6S6 (4.8 m - 6 m - 7.2 m - 8.4 m - 9.6 m - 10.8 m - 12 m)

- + 1 row of scraper blades on springs
- ✓ 6 rows of spring tines

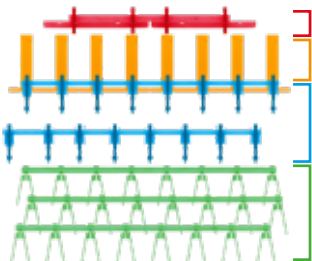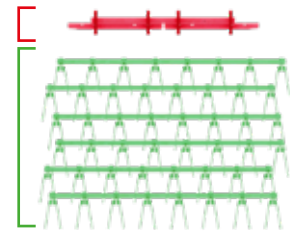


R6D2S3 (6 m - 7.2 m)

- + 1 row of scraper blades on springs
- ✓ 1 row of 60 cm scrapers on 2 half-flexible leaves
- ✓ 2 rows of scarifying shares
- ✓ 3 rows of spring tines



All models, when folded for transport, have a maximum width of 250 cm.

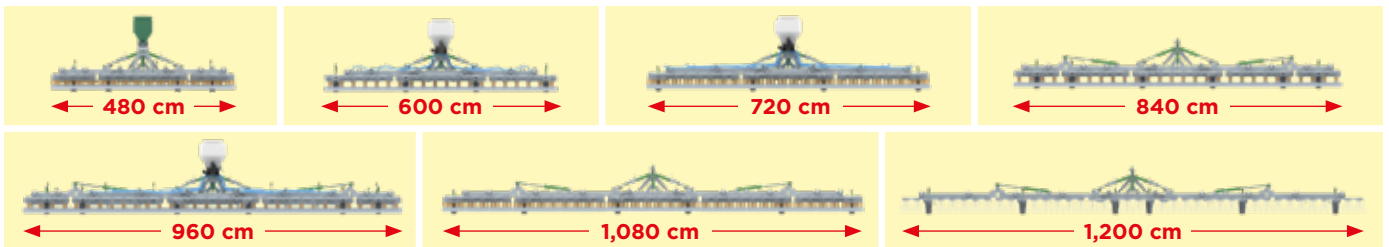

Standardised machines that **SATISFY EVERY NEED AND ADAPT TO EVERY FARM** for outstanding aeration and overseeding.

JOSKIN®



www.joskin.com • Rue de Wergifosse, 39 - 4630 Soumagne (Belgium)

E-mail: info@joskin.com • Tel.: +32 (0)4 377 35 45