

JOSKIN

www.joskin.com

DRAKKAR

IT DOESN'T PUSH; IT DOESN'T TIP;
BUT IT TRANSPORTS AND TRANSFERS!



A machine designed FOR PROFESSIONALS


Drakkar Multipurpose Trailers

Considered as the **multi-talent in the JOSKIN range**, the Drakkar is a multipurpose trailer allowing to transport many different types of material (silage, grains, pulp, beets, potatoes, etc.).

Heavy-Duty Chassis for Intensive Work




2 independent tubular chassis with 2x6 fasteners for a perfect strength.

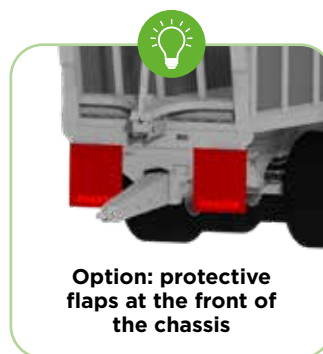


Option: protective flaps at the front of the chassis

Drawbar with Several Possible Adjustments

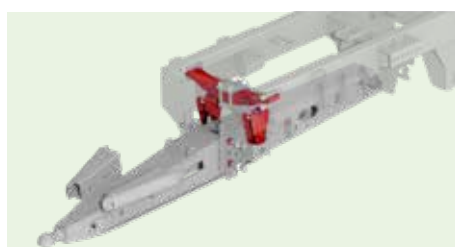


Drawbar with mechanical suspension (with cross spring leaves) on double-axle models.

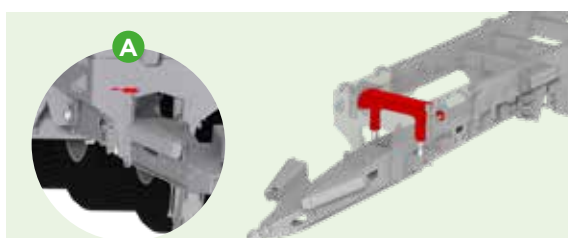


Hydropneumatic suspension drawbar on triple-axle models (optional on double-axle models).


Position indicator (A) for an easy height adjustment and to ensure the correct operation of the drawbar suspension.

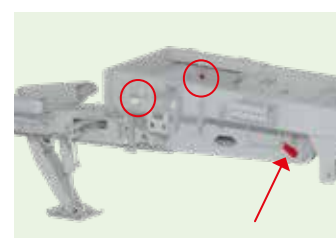


Drawbar with height adjustment (2 positions front and rear).

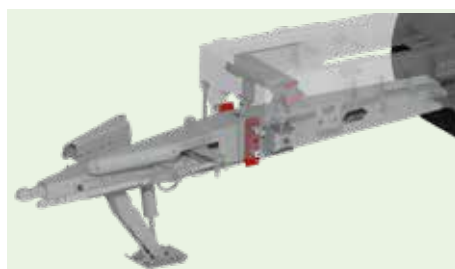

Steel drawbar guide for front suspension, with greasing points and adjustable by 4 pressure screws.

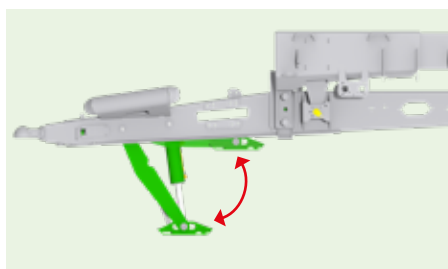

Hydraulic parking stand with wide retractable skid inside the drawbar.

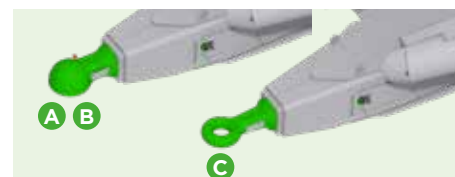


Choice between different integrated bolted eyelets


- (A) Ø 80 mm 4 t knee-joint - 40 km/h (standard)
- (B) Ø 80 mm 3 t knee-joint - 40 km/h with specific certificate for some tractor types (option)
- (C) Ø 50 mm 3 t flat swivel eye (option)



Stable, Safe and Comfortable Driving

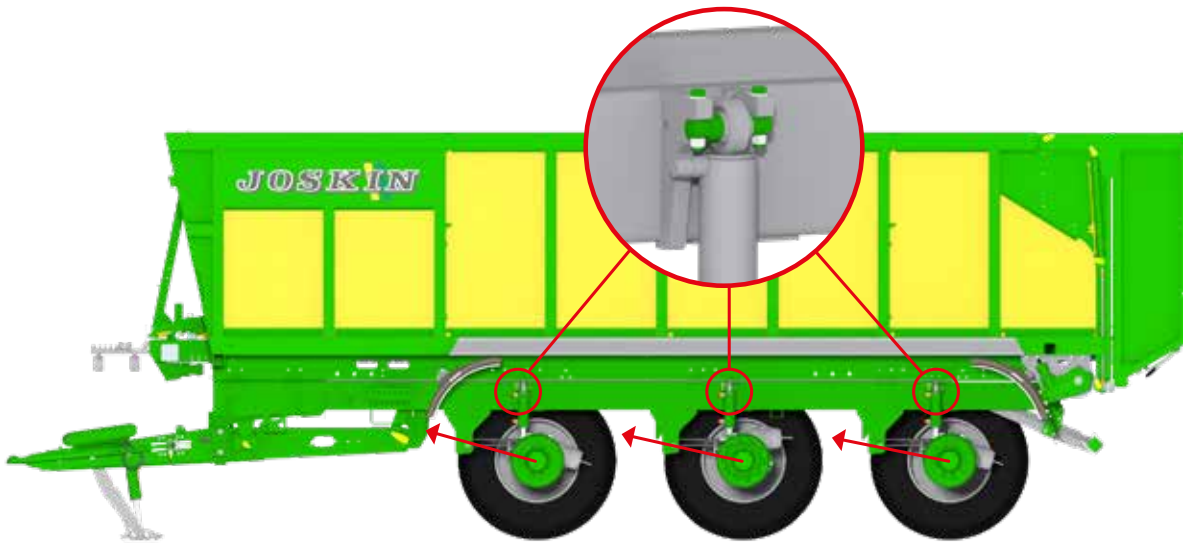

Bolted hydraulic suspension for a greater stability and less traction power required.

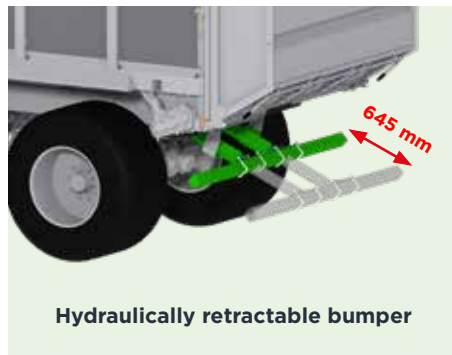

Wide Range of Tyres

Various diameters (1,172 to **1,523** mm) and widths (543 to **810** mm), many possible brands...



560/60R22.5



600/55R26.5



650/55R26.5



710/50R26.5



750/45R26.5



800/45R30.5



And many more!
Scan the QR code and make your choice on our online configurator.

JOSKIN

A real multipurpose trailer for agricultural transport, combining sturdiness, flexibility and lightness.





The Original Multipurpose Trailer **OFTEN IMITATED, NEVER EQUALLED!**




Profitability and Efficiency

The revolutionary system of the JOSKIN multipurpose trailer system enables a **fast and safe tipping-free unloading**, whatever the type of product, thanks to a hermetic conveyor belt coupled to a moving front wall.


Fast, Safe and Gentle Unloading System




- ❶ **Watertight front wall accompanying the conveyor belt** to the rear of the body: no compaction of goods, continuous unloading, no pressure on the side walls, no residues...
- ❷ **Rear door with high clearance**
- ❸ **Ribbed, perforated and self-cleaning floor:** no suction cup effect to allow the belt to slide along without unnecessary traction.
- ❹ **Hermetic conveyor belt:** belt and front wall driven by a reel at the rear of the machine and 2 powerful hydraulic motors.

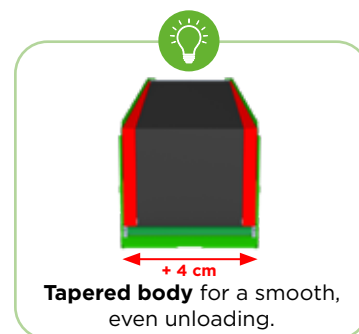

Durable Structure

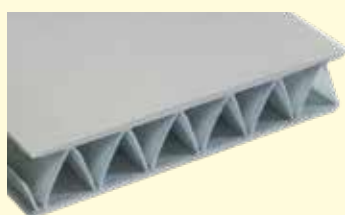

High-strength structure of the Carbofont side walls

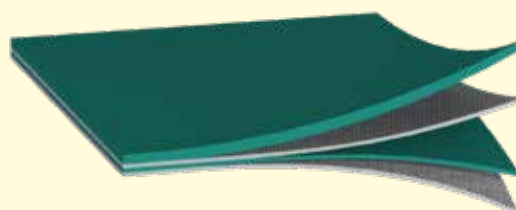


Conveyor belt structure: 4 layers of fabric and PVC with nylon reinforcement, the bottom layer being more resistant to friction.



Even More Versatile

Drakkars are standard fitted with various pieces of pre-equipment to **easily add various options**, either at the time of the order or later (even years after the purchase).


Various Extension Options

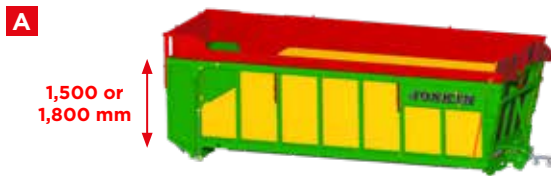


4-position mechanical extensions (50 - 250 - 400 - 550 mm), with individual adjustment on all 4 sides.



Individually retractable **hydraulic side extensions from 50 to 550 mm** - manually folding front extension - 4-position mechanical rear part.

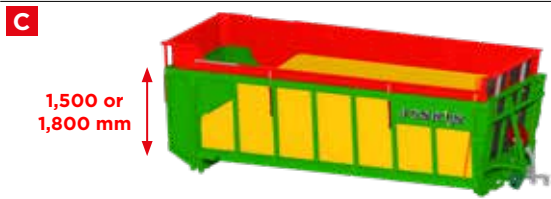

4 multi-position hydraulic extensions from 50 to 550 mm (individually retractable).

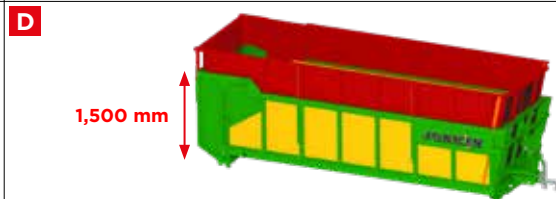

4 multi-position hydraulic extensions from 50 to 850 mm (individually retractable).

Covering Systems



Cabriolé-type cover (waterproof), without extensions or with extensions **B** lowered (impossible to cover with extensions raised).



DUO-COVER (2 covering nets on frame, specific for silage), only with extensions **A B C D**.



TELECOVER (hermetic), with a single 250 mm fixed extension on the right side.

Miscellaneous Equipment

REAL GRAIN CHASER BIN



3 transfer auger systems: HPA (350 to 600 t/h), SSN (30 to 110 t/h) and ZSN (30 to 50 t/h).



Beet grate to protect the transparent front wall from dirt.



Front platform (only for 1,800 mm high bodies).

DRAKKAR RANGE



Multipurpose Trailers for Professionals

UNIQUE, ULTRA-FAST UNLOADING SYSTEM, ensured by a hermetic conveyor belt coupled to the forward motion of the front wall: ideal for delicate harvests (e.g. potatoes).

WALLS IN LIGHTWEIGHT, DURABLE, SELF-LUBRICATING CARBOFONT PANELS.



Tapered body with identical **front (2,340 mm)** and **rear (2,380 mm)** inside widths for all models.

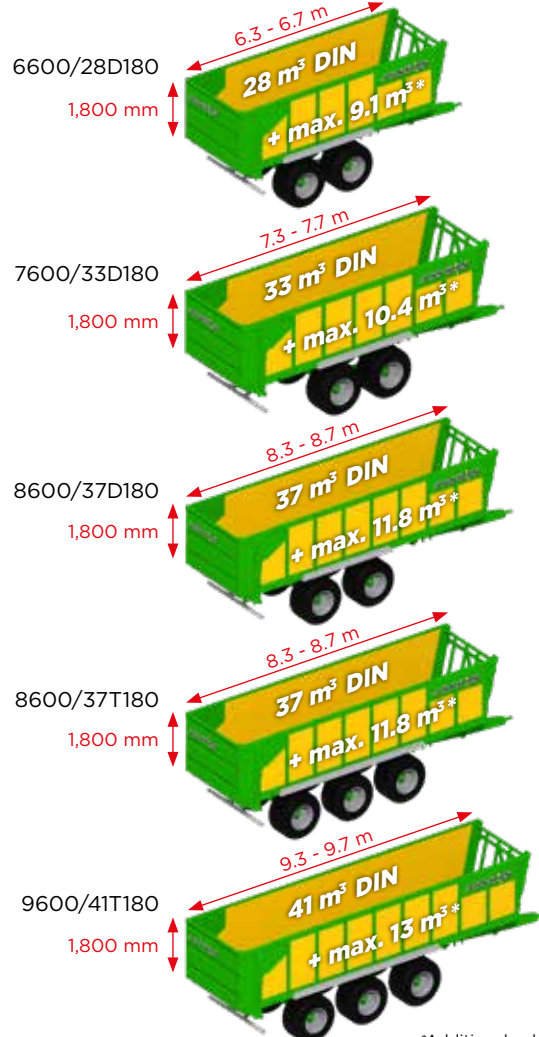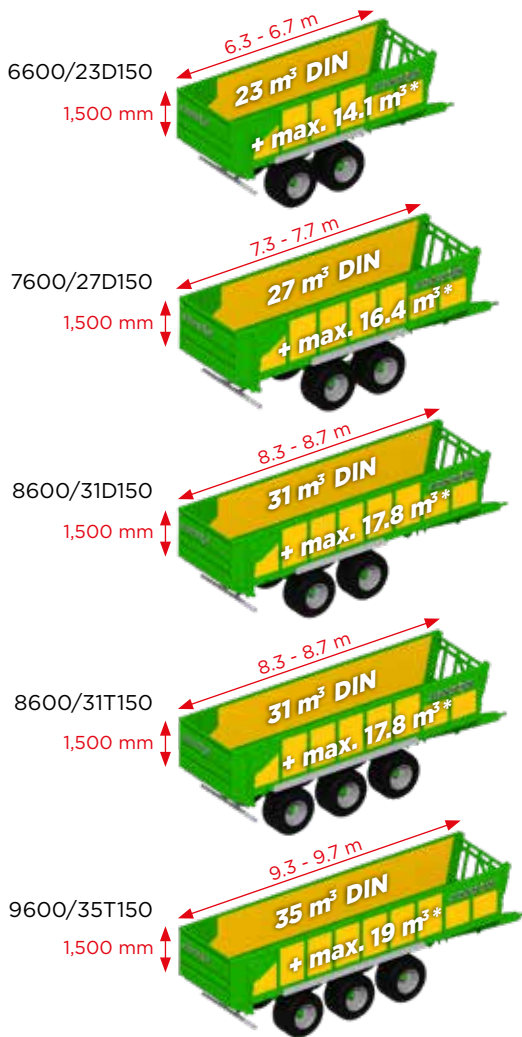

*Additional volume with max. extensions.

